




Carrying Capacity	Up to 600 Kgs
Dimensions	mm
Height	1900
Width	1805
Depth	750

Features	Specification
Name	Delivery Bag Stand
Structure	Frame constructed from MS slotted angle (40x40x3 mm) and box pipe (25x25x2 mm); reinforced with MS sheet & rod, fitted with mesh side panels for visibility and airflow
Shelving /Bag Slots	Triple-tier stand, each tier sized and partitioned to accommodate large courier/delivery bags (typically 550–625 mm per slot)
Bag Supports	MS rods (12 mm & 8 mm) used to keep bags open and upright for easy loading/unloading
Colour	Powder-coated (Ivory RAL-1015, glossy) for rust resistance
Handle	Integrated ergonomic handle, hand sleeve for comfort
Mounting /Handling	Rigid base with full-contact ground plate; can be bolted/fixed if needed
Unique Features	Open-sided, mesh-backed design allows quick bag identification and scanning. Heavy-duty construction with an organized multi-slot system improves sortation, dispatch, and manual picking efficiency.

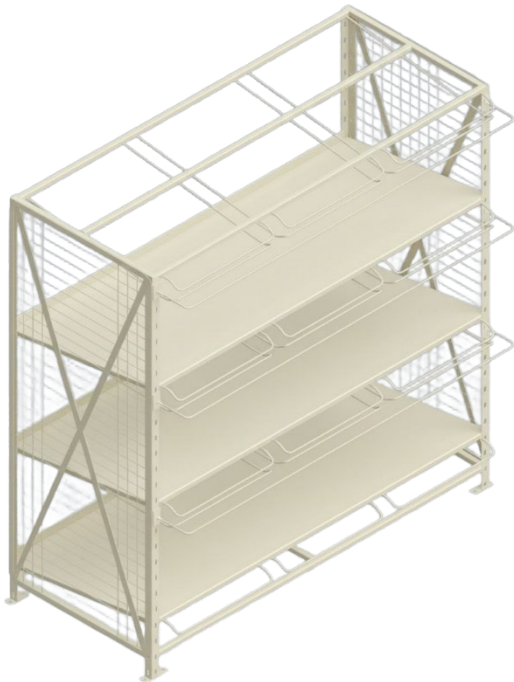